Ross

Cryocoolers 12

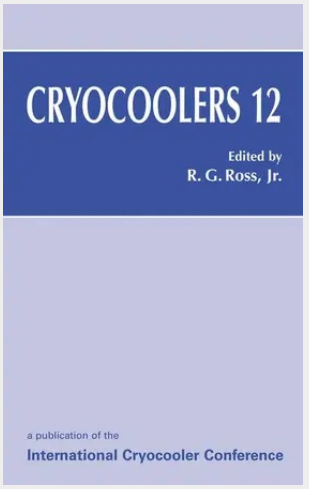

The last two years have witnessed a continuation in the breakthrough shift toward pulse tube cryocoolers for long-life, high-reliability cryocooler applications. One class of pulse tubes that has reached maturity is referred to as “Stirling type” because they are based on the linear Oxford Stirling-cooler type compressor; these generally provide cooling in the 30 to 100 K temperature range and operate at frequencies from 30 to 60 Hz. The other type of pulse tube cooler making great advances is the so-called “Gifford-McMahon type. ” Pulse tube coolers of this type use a G-M type compressor and lower frequency operation to achieve temperatures in the 2 to 10 K temperature range. Nearly a third of this proceedings covers these new developments in the pulse tube arena. Complementing the work on low-temperature pulse tubes is substantial continued progress on rare earth regenerator materials and Gifford-McMahon coolers. These technologies continue to make great progress in opening up the 2 - 4 K market. Also in the commercial sector, continued interest is being shown in the development of long-life, low-cost cryocoolers for the emerging high temperature superconductor electronics market, particularly the cellular telephone base-station market. At higher temperature levels, closed-cycle J-T or throttle-cycle refrigerators are taking advantage of mixed refrigerant gases to achieve low-cost cryocooler systems in the 65 to 80 K temperature range.

The last two years have witnessed a continuation in the breakthrough shift toward pulse tube cryocoolers for long-life, high-reliability cryocooler applications. One class of pulse tubes that has reached maturity is referred to as ¿Stirling type¿ because they are based on the linear Oxford Stirling-cooler type compressor; these generally provide cooling in the 30 to 100 K temperature range and operate at frequencies from 30 to 60 Hz. The other type of pulse tube cooler making great advances is the so-called ¿Gifford-McMahon type. ¿ Pulse tube coolers of this type use a G-M type compressor and lower frequency operation to achieve temperatures in the 2 to 10 K temperature range. Nearly a third of this proceedings covers these new developments in the pulse tube arena. Complementing the work on low-temperature pulse tubes is substantial continued progress on rare earth regenerator materials and Gifford-McMahon coolers. These technologies continue to make great progress in opening up the 2 - 4 K market. Also in the commercial sector, continued interest is being shown in the development of long-life, low-cost cryocoolers for the emerging high temperature superconductor electronics market, particularly the cellular telephone base-station market. At higher temperature levels, closed-cycle J-T or throttle-cycle refrigerators are taking advantage of mixed refrigerant gases to achieve low-cost cryocooler systems in the 65 to 80 K temperature range.

213,99 €
199,99 € (zzgl. MwSt.)

Lieferfrist: bis zu 10 Tage

Artikelnummer: 9780306477140
Medium: Buch
ISBN: 978-0-306-47714-0
Verlag: Springer US
Erscheinungstermin: 31.03.2003
Sprache(n): Englisch
Auflage: 2003
Produktform: Gebunden
Gewicht: 1575 g
Seiten: 825
Format (B x H): 170 x 251 mm

Kundenservice Verlag Dr. Otto Schmidt KG
Neumannstraße 10, 40235 Düsseldorf | kundenservice@otto-schmidt.de | 0221-93738-997 (Inland)